

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LUXULA

**Supplier's address:** ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

**Model identifier:** LX400242

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD 2835		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	30,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	148	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	58	
	Depth	112	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,380 0,380
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	80	Survival factor	-
the lumen maintenance factor	0,70		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	1,0

(a)-: not applicable;

(b)-: not applicable;

Spectrum Test Report

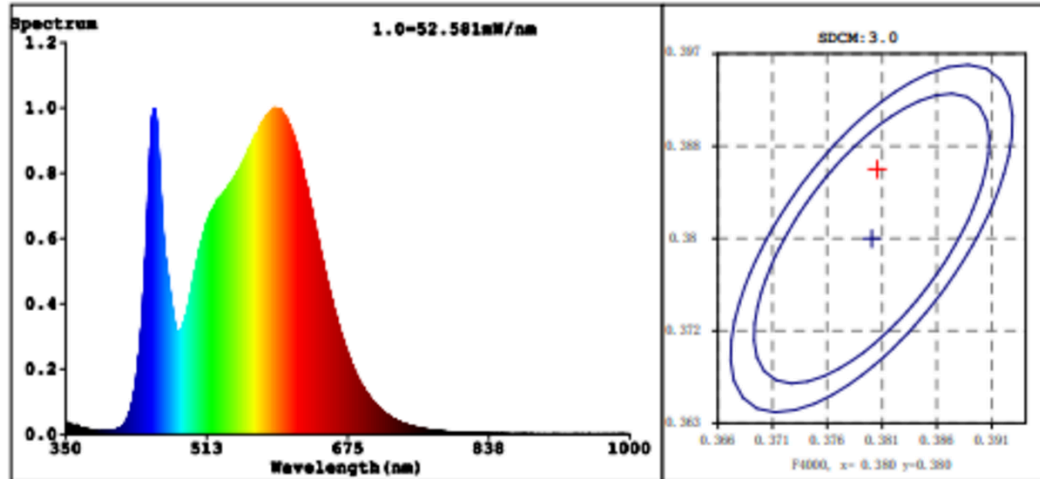

Color Parameters:

Chromaticity Coordinate:  $x=0.3805$   $y=0.3863$   $u'=0.2214$   $v'=0.5057$   
 CCT=4065K(Duv=0.0044) Dominant WL:Ld =576.6nm WL:Lc = --nm Purity=30.1%  
 Ratio:R=17.7% G=78.6% B=3.7% Peak WL:Lp=592.0nm FWHM=148.8nm  
 Render Index:Ra=82.2 AvgR=75.0 TM30:Rf=84 Rg=93

R1 =80 R2 =89 R3 =96 R4 =81 R5 =80 R6 =85 R7 =86  
 R8 =62 R9 =1 R10=73 R11=80 R12=60 R13=82 R14=98 R15=72

Photo Parameters:

Flux = 3050 lm Eff. : 102.46 lm/W Fe = 9.096 W  
 Scotopic:5202.2 S/P:1.7059

Electrical parameters:

V = 230.27 V I = 0.1300 A P = 29.76 W PF = 0.9945

LEVEL:OUT WHITE:ANSI\_4000K


Status: Integral T = 500 ms Ip = 44090 (67%)

GBT5702

Model:LX400242  
 Tester:  
 Temperature:25.3Deg  
 Manufacturer:

Number:1  
 Date:2023-09-14 09:45:07  
 Humidity:65.0%  
 Remarks:

Model placed on the Union market from 01/02/2024



**EPREL registration number:** 1901348

<https://eprel.ec.europa.eu/qr/1901348>

**Supplier:** ENOVATEK GmbH (Importer)

**Website:** [www.enovatek.de](http://www.enovatek.de)

**Customer care service:**

**Name:** ENOVATEK GmbH

**Website:** [www.enovatek.de](http://www.enovatek.de)

**Email:** [info@enovatek.de](mailto:info@enovatek.de)

**Phone:** +49 4461 / 7464233

**Address:**

Sillensteder Straße 213  
26441 Jever  
Germany